

Conceala 2 Cistern Universal Height 4.5 Litre Valve Side Supply

ILLUSTRATED

- S3640** Conceala 2 cistern 4.5 litre single flush valve side supply and internal overflow, alternative height plastic flushbends
- S4512** Finger push button pneumatic, stainless steel for 31mm maximum thickness partition

OPTIONS

- S4489** Finger push button pneumatic, stainless steel body for 400mm maximum wall thickness
- S4463** Palm push button Pneumatic, plastic for 31mm maximum thickness partition
- SV316** 3 metre tube

ILLUSTRATED PRODUCT DETAILS



Weights

- S3640** 3.00 KG
- S4512** 0.71 KG

Materials

- S3640** Plastic
- S4512** Stainless Steel

Finishes

- S3640**  Neutral / No Finish (67)
- S4512**  Stainless Steel finish (MY)

Capacity

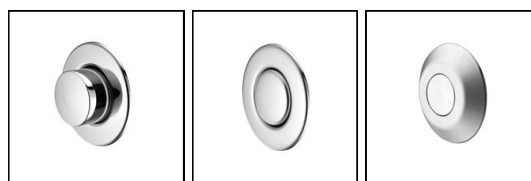
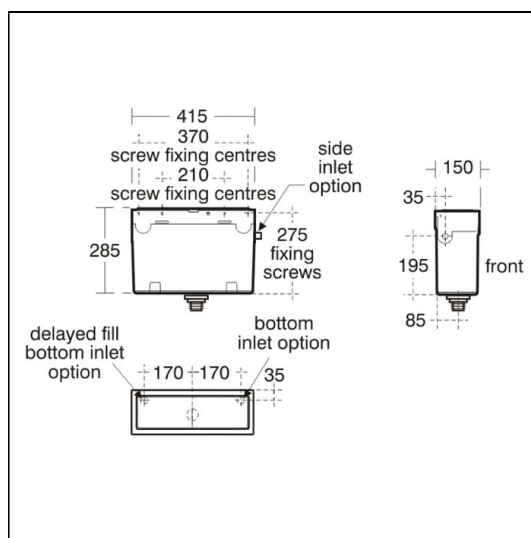
- S3640** 5 litres

Standards

Cistern to BS EN 14055

Special Notes

Valve operated cisterns are supplied with an 800mm length of plastic air tube. An optional 3m length can be purchased where remote operation is required. Syphon operated cisterns with lever supplied are suitable for 150mm max wall thickness. Longer levers can be purchased for thicker walls.



ACCREDITATIONS

S3640(67)

| | | | |
|--------------------|---|------------|----------------------------------|
| water label |  | 4.5 | Average Flushing Volume (Litres) |
|--------------------|---|------------|----------------------------------|



Flush Valve
1307005

Inlet Valve
1610073

FEATURES

