

CR SHXDIVFF C

CARRE Shower Range

Carre Exposed Fixed Head Bar Shower with Diverter & Kit



Features:

- Temperature factory set to a maximum of 38°C. Can be over-riden to a maximum of 46°C
- Separate controls for temperature and flow
- Automatic shutoff in the event of hot or cold water supply failure
- Integral diverter to shower handset
- 150mm pipe centres, particularly suitable for refurbishment
- Telescopic rigid riser for adjustable height

Product Certifications:



WRAS Cert. Number: 1503001
WRAS Expiry Date: 31/03/2021




For more products, visit our website:
<http://www.bristan.com>



Specification

Style:	Contemporary
Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Bar with rigid riser
Shower Head Type:	Both
Valve/Cartridge Type:	Thermostatic
Maximum Hot Water Supply Temperature °C:	65
Dynamic Pressure Range: (bar)	5
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All, preferably balanced
Working Pressure Range:	Min. 0.5 bar, Max. 5.0 bar
Flow Rate: (l/min @ 3 bar)	14.9
Connection Inlet:	15mm compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	No

Dimensions (measurements in mm)

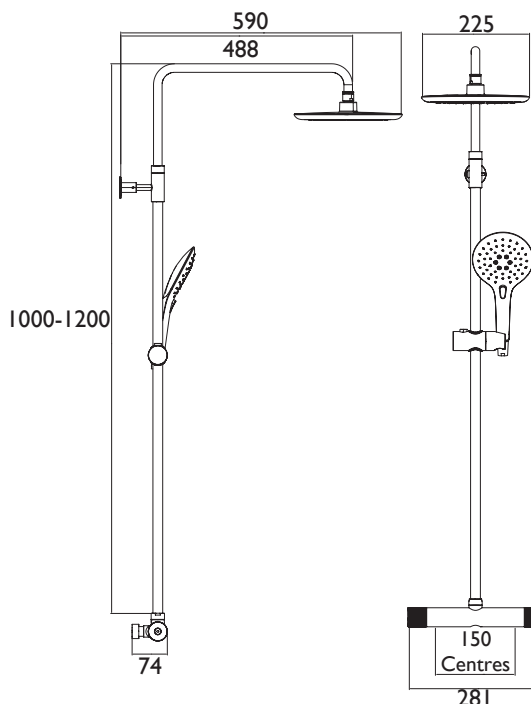

Flow Rates (l/min)

System Pressure (bar)	0.5	1	2	3	4	5
Through Shower Rose	6.2	8.7	12.4	15.2	17.5	19.6
Through Handset	6.0	8.6	12.1	14.9	17.2	19.2

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS

D8