

AE SHXAR C

ACUTE Shower Range Acute AE SHXAR Thermostatic Surface Mounted Shower Valve with Adjustable Riser Chrome



Features:

- Adjustable inlet centres from 110mm to 155mm
- TMV2 thermostatic control for a higher level of performance and protection
- Factory fitted flow regulators means this is a water saving "Eco" shower
- Adjustable fixing brackets on riser rail enables existing screwholes to be used
- Supplied with rub clean handset

Product Certifications:




WRAS Cert. Number: 1905901
WRAS Expiry Date: 31/05/2024



TMV2 Cert. Number: NSF2126/0619
TMV2 Expiry Date: 13/06/2019




For more products, visit our website:
<http://www.bristan.com>



Specification

Style:	Traditional
Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Exposed Sequential
Shower Head Type:	Adjustable
Valve/Cartridge Type:	Sequential
Maximum Hot Water Supply Temperature	80
Dynamic Pressure Range: (bar)	5
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All, Preferably Balanced
Working Pressure Range:	Min. 0.2, Max. 5.0
Flow Rate: (l/min @ 3 bar)	7.5
Connection Inlet:	G 1/2" BSP
Connection Outlet:	N/A
Isolation Valve Included:	No
Check Valve Included:	No

Dimensions (measurements in mm)

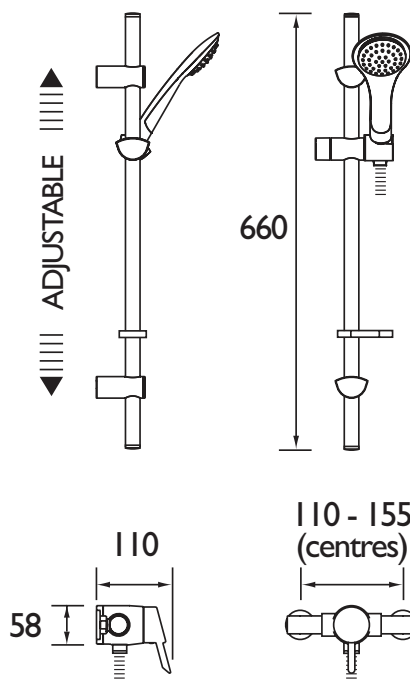

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
With Flow Regulators	---	---	6.7	7.2	7.5	7.8
Without Flow Regulators	10	12.4	17.6	24.9	30.5	39.5

TECHNICAL
DATA
SHEET



BRISTAN

D8