Z2 LUX 1/2 C

COMMERCIAL Tap Range Single Luxury Soft Touch Timed Flow Ba-



		ur		
\sim $^{\circ}$	ΥТ.	ши	\sim	-
=c	1			٦.

- Timed shut off to meet BS EN 816
- Soft touch east to use mechanism
- Supplied wirth both hot and cold indices
- Supplied with 5l/min flow regulator (not fitted)
- Flow valve is timed and will shut off in 15 +/-5 seconds

Product Certifications:

WRAS No: 1401911 WRAS Expiry Date: 31/01/2019






For more products, visit our website:



Specification					
Style:	Contemporary				
Product Type:	Bathroom taps				
Finish/Colour:	Chrome				
Main Construction Material:	Brass				
Mount Type:	Deck				
Handle Type:	Push Button				
Connection Inlet:	1/2" BSP				
Number of Tap Holes Required:	1				
Valve/Cartridge Type:	Self Closing Valve				
Plumbing System Suitability	All				
Working Pressure Range:	Min. 0.5 bar - Max. 5 bar				
Maximum Hot Water Temperature: °c	65				
Maximum Dynamic Pressure: (bar)	5				
Maximum Static Pressure: (bar)	10				
Flow Type:	Single flow				
Flow Rate: (I/min @ 3 bar)	36.7				
Connection Outlet:	Open				
Isolation Included:	No				

Dimensions (measurements in mm)

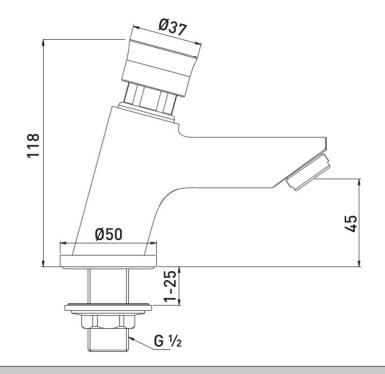

Flow Rates (I/min)										
System Pressure (bar)	0.2	0.5	1	2	3	5				
Z2 LUX 1/2 C	9	15	21.2	30	36.7	47.4				

TECHNICAL DATA SHEET



