

FZ SHXMMCTFF C

COOLTOUCH Shower Range FRENZY Cool Touch Bar Mixer with Fast Fit Connections and Multi Mode Kit



Features:

- 15mm inlet connections
- Thermostatic cartridge with preset temperature stop at 38°C, can be over-riden to a maximum of 46°C
- Unique Safe Touch technology ensures the valves stays cool to the touch while in use
- Dual control - flow and temperature are controlled separately
- Supplied with a wall mount 12 fixing kit for easier retro installation

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Cool Touch Bar Mixer
Shower Head Type:	Adjustable
Valve/Cartridge Type:	Exposed
Maximum Hot Water Supply Temperature °C:	60
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All - Ideally Balanced
Working Pressure Range:	Min. 0.2 Bar, Max 5.0 Bar
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	No

Dimensions (measurements in mm)

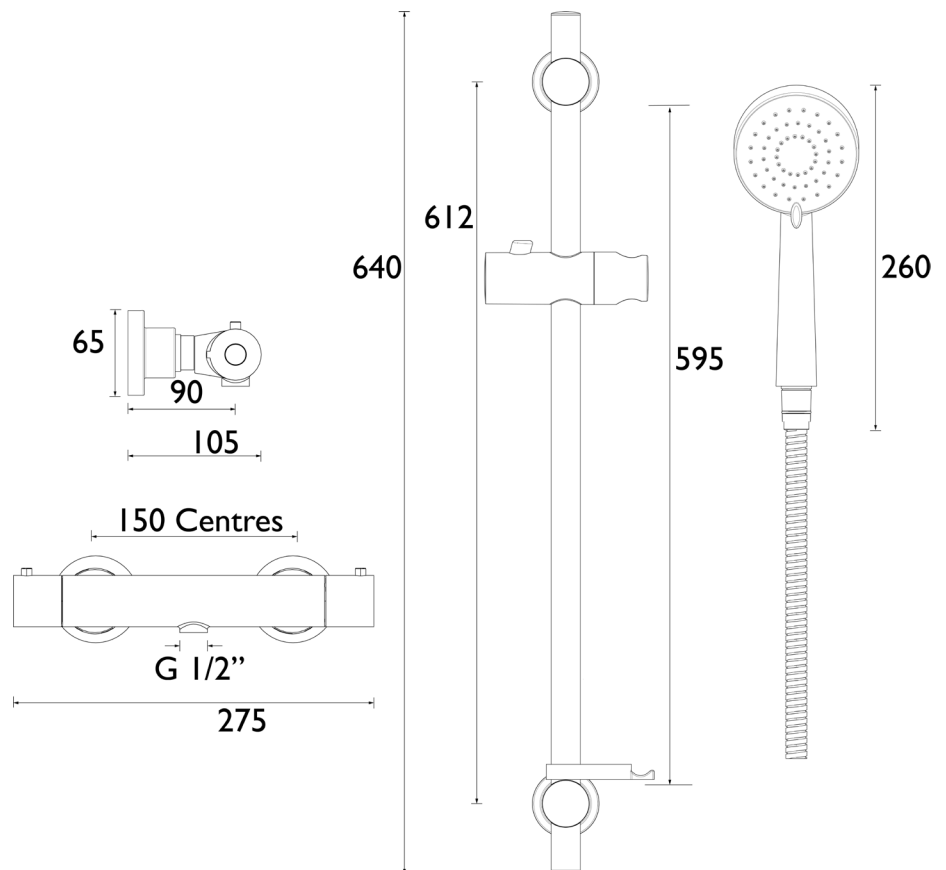

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	4.2	7.5	11.2	15.8	19.4	25

TECHNICAL DATA SHEET



BRISTAN

D5