


# TECHNICAL DATA SHEET

## JUTE

### Surface Mounted Shower Valve With Adjustable Riser

#### Product Specification

Product Code:	JU2 SHXAR C
Finishes:	Chrome
Product Type:	Traditional
Construction:	Body is of Brass Construction
Cartridge Type:	Standard
Supply:	Suitable for all plumbing systems, preferably balanced
Inlet Connections:	15mm Compression Connections
Outlet Connections:	G1/2"
Working Pressures:	Min 0.2 bar Max. 5.0 bar
Dimensions:	150mm inlet centres

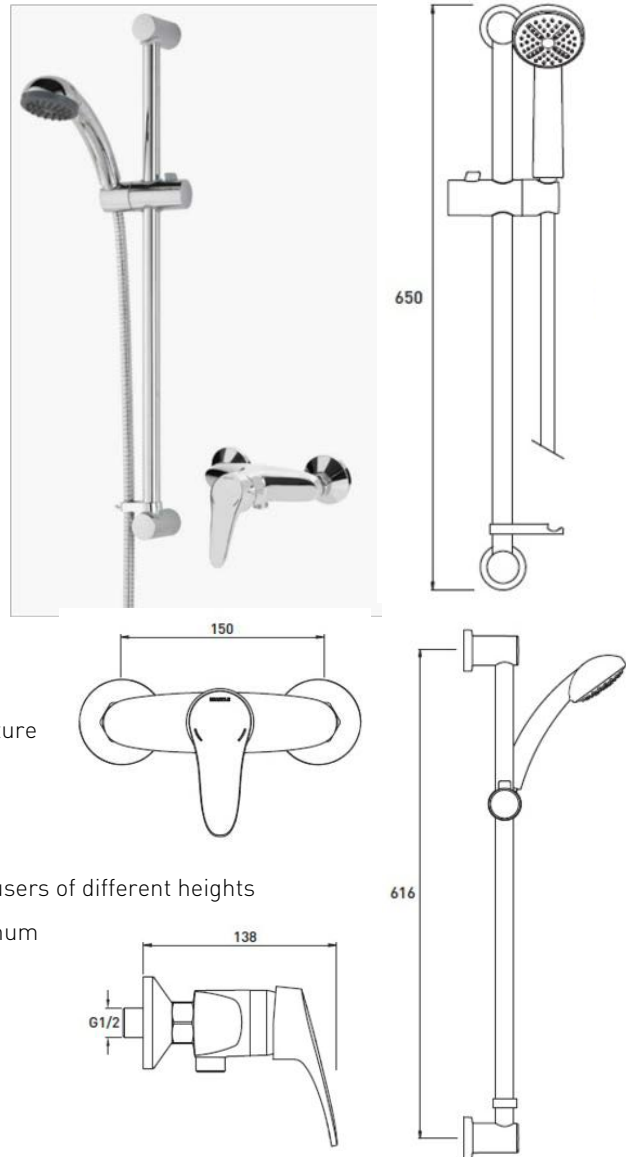

#### Additional Information

- Operates using a single lever handle controlling both flow and temperature
- Supplied with riser rail, 1.5m hose, hose retainer, slider and a single function handset
- Adjustable riser can be used to cover existing holes in the wall.
- The slider bracket adjusts up and down the riser rail to accommodate users of different heights
- If the shower valve is installed at low pressure (tank fed) then the minimum distance from the highest installed position of the shower head to the underside of the cold tank should be at least 2m to ensure adequate performance
- Chrome plated to BS EN 248

#### Flow Rates (litres per minute)


System Pressure	0.1bar	0.2bar	0.5bar	1.0bar	2.0bar	3.0bar	5.0bar
With Hose	5.7	8.06	12.74	18.01	25.48	31.2	40.28
Without Hose	4.1	5.8	9.17	12.97	18.34	22.46	29

#### Compliance / Approvals

WRAS Approval No: 1404304 (Valve Only)

**Technical Advice:** For further information please call 0844 7016273  
or email [customer@bristan.com](mailto:customer@bristan.com)

**Guarantee:** 5 years covering manufacturing faults.

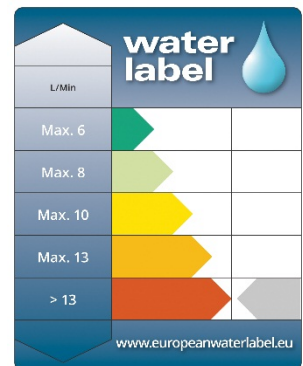

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 15G  
Telephone: 0844 701 6274 Facsimile: 0844 701 6275  
Web Site: [www.bristan.com](http://www.bristan.com) Email: [enquire@bristan.com](mailto:enquire@bristan.com)

