

Tesi Single Lever Exposed Bath Shower Mixer



Suitable for balanced supplies. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device, please see A5900AA (for use with 15mm pipework) or A5901AA (for use with 22mm pipework). Unregulated flow rate 15 litres per minute at 1.5 bar and 21 litres per minute at 3 bar.

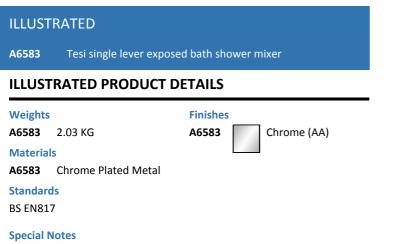



ACCREDITATIONS



E: info@idealspec.co.uk | T: 0870 122 8822 | F: 0870 122 8282 | www.idealspec.co.uk

