
Tesi 1 Hole Bath Filler



Special Notes

Suitable for balanced supplies. Inlets 15mm plain copper tails. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device, please see A5900AA (for use with 15mm pipepwork) or A5901AA (for use with 22mm pipework). Unregulated flow rate 15.2 litres per minute at 0.2 bar.

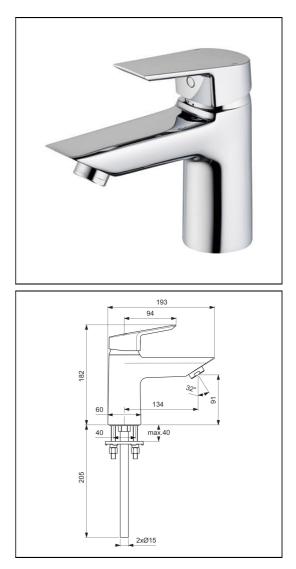

ACCREDITATIONS



