
Ceraline Mini Basin Mixer



Special Notes

Suitable for balanced supplies. Inlets with flexible hoses and connections for 15mm copper tails. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Fitted with a 5 lpm outlet flow regulator. Unregulated flow rate 4.8 litres per minute at 0.2 bar.

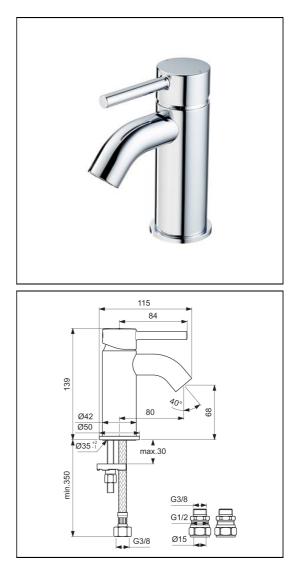

ACCREDITATIONS

