


Thermostatic shower mixer for concealed installation # C142000160..

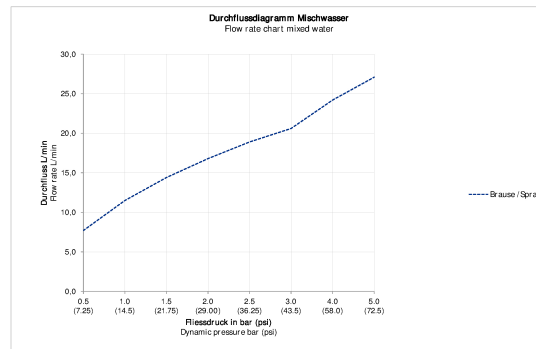

Thermostatic shower mixer for concealed installation	Dimension	Weight	Order number
<p>Connection type: basic set for concealed installation, Thermostatic cartridge, round escutcheon Ø 170 mm, flow rate 20,6 l/min (3 bar), safety lock at 38°C, includes: visible parts with functional unit, recommended operating pressure 3 - 5 bar, 1 outlet, with shut-off valve</p>			
Colors			
10 Chrome 46 Black Matt			
Variant			
Surface Chrome			C142000160..
Necessary accessory			
Bluebox® 1/2" BLUEBOX® is a registered trademark of Oras Oy, Basic set for concealed installation, Installation depth 75 mm - 105 mm, without shut-off valves, Connection size DN15			GK0900000
Bluebox® 3/4" BLUEBOX® is a registered trademark of Oras Oy, Basic set for concealed installation, Installation depth 75 mm - 105 mm, with isolating valves			GK0900001
Suitable accessories			
Showerhead Showerhead angle adjustable, Spray modes: 1, Material: stainless steel, connection thread 1/2", Installation: ceiling or wall, flow rate 12,2 l/min (3bar), 400 x 400 mm			UV0660029
Showerhead Showerhead angle adjustable, Spray modes: 1, Material: stainless steel, connection thread 1/2", Installation: ceiling or wall, 300 x 300 mm			UV0660028
Showerhead Showerhead angle adjustable, Spray modes: 1, Material: stainless steel, connection thread 1/2", Installation: ceiling or wall, 240 x 240 mm			UV0660027

Thermostatic shower mixer for concealed installation # C142000160..

Showerhead Showerhead angle adjustable, Spray modes: 1, Material: stainless steel, connection thread 1/2", Installation: ceiling or wall, flow rate 12 l/min (3bar)	UV0660016
Showerhead Showerhead angle adjustable, Spray modes: 1, Material: stainless steel, connection thread 1/2", Installation: ceiling or wall	UV0660015
Showerhead Showerhead angle adjustable, Spray modes: 1, Material: stainless steel, connection thread 1/2", Installation: ceiling or wall	UV0660014
Showerhead Showerhead angle adjustable, Spray modes: 1, material: plastic, connection thread 1/2", Installation: ceiling or wall	UV0660013
Shower rail height-adjustable hand shower holder, Ø 20 mm	UV0600002
Shower rail height-adjustable hand shower holder, Ø 20 mm	UV0600001
Shower hose twist-free nut, with conical hose nut, connection thread 1/2"	UV0610005
Shower hose twist-free nut, with conical hose nut, connection thread 1/2"	UV0610004
Shower hose twist-free nut, with conical hose nut, connection thread 1/2"	UV0610003
Hand shower Air Ø 140 mm connection thread 1/2", silicone naps for easy cleaning, click! - button to switch between spray modes, with air function, Spray modes: 3, Ø 140 mm, Surface Chrome	UV0650012
Hand shower Air Ø 120 mm connection thread 1/2", silicone naps for easy cleaning, click! - button to switch between spray modes, maximum flow rate 7 / 18 l/min (3bar), flow limiter enclosed, with air function, Spray modes: 3, Ø 120 mm	UV0650011
Hand shower Air Ø 105 mm connection thread 1/2", silicone naps for easy cleaning, Spray modes: 1, with air function, Surface Chrome	UV0650010
Hand shower Ø 106 mm connection thread 1/2", silicone naps for easy cleaning, spray mode adjustment by turning, Spray modes: 3, Surface Chrome	UV0650009
Hand shower Ø 97 mm connection thread 1/2", silicone naps for easy cleaning, Spray modes: 1, maximum flow rate 7 / 12 l/min (3bar), flow limiter enclosed, Surface Chrome	UV0650008

All drawings contain the necessary measurements which are subject to standard tolerances. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished ceramic piece.

Thermostatic shower mixer for concealed installation #
C142000160..

