

GLR SHC3DIV C

GLORIOUS Tap Range Glorious Concealed Dual Control Valve + Diverter + Stopcock



Features:

- 15mm inlet connections
- This shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Fitting depth including plasterboard and tiles is 60mm - 75mm
- Minimum cold water supply temperature is 4°C
- Maximum hot water supply temperature is 80°C

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Product Type:	Thermostatic Shower
Main Construction Material:	Brass
Mount Type:	Wall Mounted
Handle Type:	Cross Handles
Connection Inlet:	15mm Compression Connections
Connection Outlet:	N/A
Number of Tap Holes:	N/A
Valve/Cartridge Type:	Thermostatic
Plumbing System Requirements:	All - Ideally Balanced
Working Pressure Range:	Min. 0.2 Bar - Max. 5.0 Bar
Maximum Hot Water Temperature: °C	80
Maximum Static Pressure: (bar)	10
Flow Type:	Single Flow
Isolation Included:	No

Dimensions (measurements in mm)

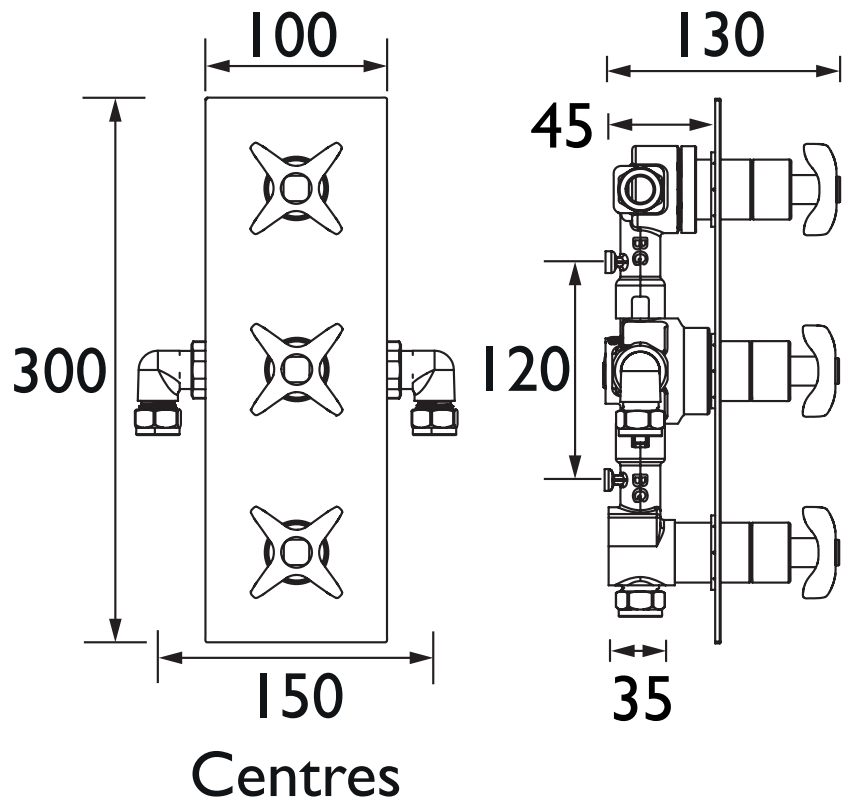

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
GLR SHC3DIV C	8.3	14.5	21.2	29.9	36.7	47.4

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS

D3