


Bathtub thermostat for exposed installation # WA52200000.. / WA52200000.. / WA52200000.. / WA52200000..

|< 42 mm >|

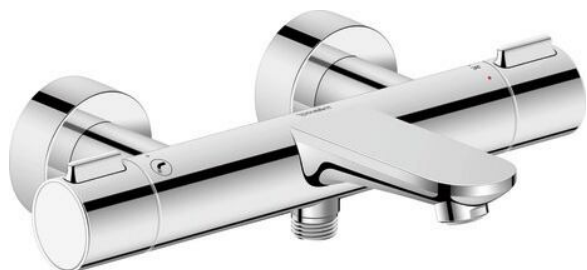

| Bathtub thermostat for exposed installation | Dimension | Weight | Order number |
|---|--------------|----------|--------------|
| Connection type for water supply connection: S-connections, Dimension of connection hose: 1/2", Centre distance: 150 mm ± 15 mm, Thermostat cartridge, recommended operating pressure: 1 - 5 bar, Spray mode: Normal spray, Safety lock at 38 °C, Diverter valve, Non-return valve in the hose connection, Shut-off and diverter valve, Flow rate (3 bar): 18 l/min | | | |
| Colors | | | |
| 04 Brushed Bronze 10 Chrome 34 Polished Gold 46 Black Matt 70 Brushed Stainless Steel | | | |
| Variant | | | |
| Bronze Brushed, Noise class: II | 303x42 mm | 2.580 kg | WA52200000.. |
| Chrome, Noise class: II | 303x42 mm | 2.580 kg | WA52200000.. |
| Gold Polished, Noise class: II | 303x42 mm | 2.580 kg | WA52200000.. |
| Black Matt, Noise class: II | 303x42 mm | 2.580 kg | WA52200000.. |
| Stainless steel Brushed, Noise class: II | 303x42 mm | 2.580 kg | WA52200000.. |
| Suitable accessories | | | |
| Hand shower 3jet Click! MinusFlow MinusFlow, Spray mode: Rain, Pulse, Mono, Dimensions of water supply connection: 1/2", Spray mode selection: Push button, Flow rate (3 bar): 9 l/min, Silicone nubs | 240 x 120 mm | 0.24 kg | UV0652017 |
| Stick hand shower MinusFlow, Rain, Flow rate (3 bar): 9 l/min, Silicone nubs | 187 x 25 mm | 0.14 kg | UV0642001 |
| Shower hose Rotation lock: Yes, Dimensions of water supply connection: 1/2", Nut shape: Conical, 1600 mm | 1600 x 23 mm | 0.34 kg | UV0610007 |
| Hand shower holder Material: Brass, Hand shower holder: Fixed, Escutcheon shape: Round, Mounting bracket shape: Conical | 55 x 102 mm | 0.3 kg | UV0620007 |
| Suitable accessories for Bronze Brushed, Noise class: II, Chrome, Noise class: II, Gold Polished, Noise class: II, Stainless steel Brushed, Noise class: II | | | |
| Hand shower 3jet MinusFlow MinusFlow, Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Flow rate (3 bar): 9 l/min, Silicone nubs | 245 x 110 mm | 0.2 kg | UV0652016 |

Bathtub thermostat for exposed installation # WA52200000.. / WA52200000.. / WA52200000.. / WA52200000..

|< 42 mm >|

| | | | |
|---|--------------|---------|-----------|
| Hand shower 1jet Spray mode: Rain, Dimensions of water supply connection: 1/2", Silicone nubs | 245 x 110 mm | 0.16 kg | UV0650014 |
| Hand shower 1jet MinusFlow MinusFlow, Spray mode: Rain, Dimensions of water supply connection: 1/2", Flow rate (3 bar): 9 l/min, Silicone nubs | 245 x 110 mm | 0.16 kg | UV0652014 |
| Hand shower 3jet Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Silicone nubs | 245 x 110 mm | 0.2 kg | UV0650016 |
| Suitable accessories for Chrome, Noise class: II, Black Matt, Noise class: II | | | |
| Hand shower 1jet Spray mode: Rain, Dimensions of water supply connection: 1/2", Silicone nubs | 245 x 110 mm | 0.16 kg | UV0650013 |
| Hand shower 1jet MinusFlow MinusFlow, Spray mode: Rain, Dimensions of water supply connection: 1/2", Flow rate (3 bar): 9 l/min, Silicone nubs | 245 x 110 mm | 0.16 kg | UV0652013 |
| Hand shower 3jet Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Silicone nubs | 245 x 110 mm | 0.2 kg | UV0650015 |
| Hand shower 3jet MinusFlow MinusFlow, Spray mode: SoftRain, Rain, IntenseRain, Dimensions of water supply connection: 1/2", Spray mode selection: Rotating blasting disc, Flow rate (3 bar): 9 l/min, Silicone nubs | 245 x 110 mm | 0.2 kg | UV0652015 |
| Hand shower 3jet Click! Spray mode: Rain, Pulse, Mono, Dimensions of water supply connection: 1/2", Spray mode selection: Push button, Silicone nubs | 240 x 120 mm | 0.24 kg | UV0650017 |
| Stick hand shower 1jet Dimensions of water supply connection: 1/2", Silicone nubs | 187 x 25 mm | 0.14 kg | UV0640001 |
| Stick hand shower 1jet Dimensions of water supply connection: 1/2", Silicone nubs | 212 x 22 mm | 0.18 kg | UV0640002 |
| Stick hand shower MinusFlow, Flow rate (3 bar): 9 l/min, Silicone nubs | 212 x 22 mm | 0.18 kg | UV0642002 |
| Hand shower holder Material: ABS, Hand shower holder: Fixed, Mounting bracket shape: Conical | 38 x 58 mm | 0.04 kg | UV0620001 |
| Shower hose Rotation lock: Yes, Dimensions of water supply connection: 1/2", Nut shape: Conical, 1250 mm | 1250 x 23 mm | 0.28 kg | UV0610006 |
| Shower hose Rotation lock: Yes, Dimensions of water supply connection: 1/2", Nut shape: Conical, 1800 mm | 1800 x 23 mm | 0.37 kg | UV0610008 |
| Hand shower holder Material: Brass, Hand shower holder: Fixed, Escutcheon shape: Square, Mounting bracket shape: Conical | 55 x 102 mm | 0.3 kg | UV0620026 |

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.

Bathtub thermostat for exposed installation # WA52200000.. /
WA52200000.. / WA52200000.. / WA52200000..

|< 42 mm >|

