


Geberit Duofix set of elements for wall-hung WC, 112 cm, with Sigma concealed cistern 12 cm, Sigma01 flush plate, round, Smyle Square wall-hung WC, Rimfree

■ GEBERIT

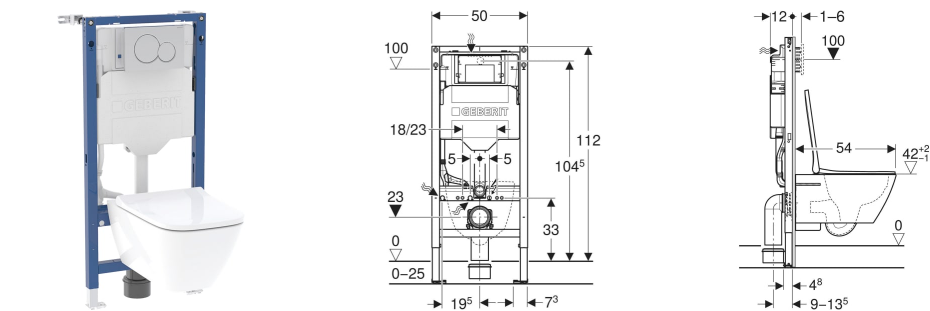

APPLICATION PURPOSES

- For metal and wood frame walls
- For Geberit Duofix system walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–25 cm

CHARACTERISTICS

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- Frame for wall-hung WCs with connection dimensions as per EN 33 and projection up to 70 cm
- With pull-out plate for lateral fastening above the element on metal or wood profiles or on Geberit Duofix system studs
- Alternative fastening point for wall anchors
- Rotating foot plates, suitable for installation in U profiles UW 50 and UW 75
- Foot plates that can be mounted in Geberit Duofix system rail without tools, without additional components
- Galvanised non-slip leg supports protected against corrosion
- Connection bend can be mounted without tools at different depths, adjustable range 45 mm

- Geberit Sigma concealed cistern 12 cm, fully insulated against condensation
- Cistern fulfils standard requirements in accordance with EN 14055, Class II
- Dual flush
- Front actuation
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the rear or top centre
- Protection box for service opening, can be cut to length, protects against moisture and dirt
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Fastening option for electrical connection
- Washdown WC

TECHNICAL DATA

Flow pressure	0.1–10 bar
Operating temperature, water max.	25 °C
Flush volume, factory setting	5.8 / 3 l
Button shape	round
Product material	Vitreous china
Fastening distance	18 cm

Odour extraction unit

No

SCOPE OF DELIVERY

- Geberit Duofix element for wall-hung WC
- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- 2 wall anchors
- Connection set for WC, ø 90 mm
- Connection bend 90° made of PE-HD, ø 90 mm
- Adaptor socket made of PE-HD, ø 90 / 110 mm
- Sound insulation set
- Fastening and protection material
- Geberit Sigma01 flush plate for dual flush, round
- Geberit Smyle Square wall-hung WC set, washdown, shrouded, Rimfree, with WC seat, overlapping lid

ACCESSORIES

- Geberit Duofix set of wall anchors for single installation, corner construction
- Geberit Duofix set of wall anchor extensions
- Geberit Duofix system fastening bracket
- Geberit Duofix fastening material for stud clearance 50–57.5 cm
- Geberit Duofix set of foot fastener on rear wall

- Geberit sound insulation set for wall-hung WC
- Geberit Duofix set of foot extensions 20 cm length
- Geberit drilling template for wall-hung WC and Geberit AquaClean
- Insert for Geberit DuoFresh stick, for Sigma concealed cistern 12 cm

- Geberit DuoFresh insert for stick, for Sigma concealed cistern 12 cm
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm
- Geberit DuoFresh module with manual actuation and insert for Geberit DuoFresh stick, for Sigma concealed cistern 12 cm

- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm
- Geberit DuoFresh module with automatic actuation and insert for Geberit DuoFresh stick, for Sigma concealed cistern 12 cm

Art. no.	Colour / surface	B cm	H cm	T cm	Outlet	Quick-release hinges	Soft-closing mechanism
118.349.21.2 New	chrom / glossy	50	112	12	horizontal	yes	yes

New article available from 01.06.2025