



Push plate supplied

Shown: Concealed fixing frame including cistern  
FRAMELSIAM2PT

CI/SfB
(74)

### Overview:

For installing a wall hung-standard, extended or compact WC. This heavy duty wall frame is suitable for bearing up to a 400kg load. Designed for wall installation.



### Key product features:

- Dual flush 6/4 litres factory preset, adjustable to 4/2.6 litres
- Matt chrome effect push plate
- Strong and sturdy design
- Delayed fill inlet valve
- WRAS approved
- Flush plate located above seat radius

Product:	Tall fixing frame
Code:	FRAMELSIAM2PT
Weight in kg:	14.8
Colour:	Matt chrome effect push plate
Material:	Mixed metal & plastics
Standard:	NF, EN14055 CL2
DOP:	n/a
BiM download:	x
CAD download:	x
Flushing volume:	6/4ltr standard / Adjustable down to 4/2.6ltr
Flushing mechanism:	Dual flush push plate
Operation:	Mechanical
Delayed fill inlet valve:	✓
Access:	Front
Inlet location:	Side - RHS

### Special notes

Supplied as two parts in a single box

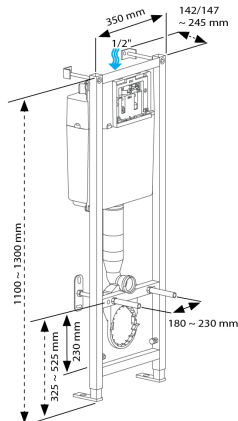

1 = 142/147~245 mm  
2 = 16 ~ 100 mm  
4 = 0 ~ 200 mm  
if 3 = 400 => 4 = 200 mm max\*  
if 3 = 480 => 4 = 120 mm max\*  
\*When the distance between the WC  
fixing axle and the WC seat is 75 mm.